



Main Specification



Length OA 6.4m

7.2m Length (inc jet bar)

> Beam 2.5m

Draught (light condition) 0.3m

Full load displacement

2790 Kg

Main Engine

Steyr164, 163 BHP @ 4000 rpm

Gearbox

ZF Marine, HSW 450A 1.56:1, Reduction ratio

Propulsion

Hamilton Jet, HJ 241

Steering Gear

Wagner UK, HP100-001 701G, Helm unit

Speed

25 knots





6.4m Fire & Rescue Boat

Capacities Fuel Capacity

165 litres

Auxiliary Equipment

Typical options;

Manual Bilge Pump Whale Gusher Urchin, Capacity 43 L/min

Electric Bilge Pump Rule 500, 12v, Capacity 500 G/hr

Fixed Aerosol Fire Suppression System Electrical 2 off 12v batteries

Special Features

Including:

Fendering High performance polyurethane covered elastomer foam

Fire fighting Pump Rosenbauer 'Otter',

lightweight fire pump

800 L/min @ 5 bar

4 off Lifting eyes

Towing Post

Transom platform

6 off Deck Cleats

LED Navigation lights

Siren/PA Whelen WPA system


Beacon Premier Hazard Ltd, Aeromax,


12v Twin Blue Strobe


RaymarineEchosounder and Log

Classification

Built in accordance with MCA SCV Code of Practice.

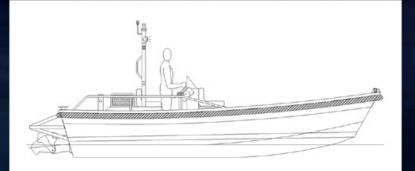

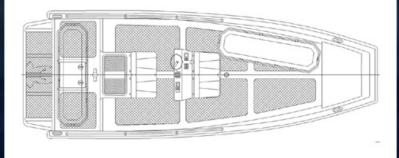





Holyhead Marine Services Limited

Newry Beach Yard, Holyhead, Anglesey, LL65 1YB, Wales, UK Tel: +44(0)1407 760111 Fax: +44(0)1407 764531

e-mail: marine.services@holyhead.co.uk website: www.holyheadmarine.co.uk

Registered in London 895484



