






## **SPECIFICATIONS**


LENGTH OVERALL	11.3M	12.5M	12.5M WIDE	
LENGTH WATERLINE	9.2M	10.9M	10.9m	
BEAM OVERALL	4.0M	4.1M	4.26m	
BEAM INTERNAL	3.2M	3.2M	3.65m	Topping the other
DEADRISE	23° PROGRESSIVE	23° PROGRESSIVE	21° PROGRESSIVE	
CREW POSITIONS	2	2	2	
SURVEY NUMBERS	UP TO 30	UP TO 36	UP TO 44	
TOILET COMPARTMENT	INSIDE CONSOLE	INSIDE CONSOLE	INSIDE CONSOLE	
PONTOON/FENDER	600MM D-SECTION	600MM D-SECTION	600MM D-SECTION	
ENGINES	2 X 350 TO 3 X 300 HP (STERNDRIVES OPTIONAL)	3 X 300 HP	3 X 300-350; 4 X 300 HP (STERNDRIVES OPTIONAL)	Acar
FUEL CAPACITY	700 LITRES	1500 LITRES	1500 LITRES	
MAXIMUM SPEED	40+ KNOTS	40+ KNOTS	40+ KNOTS	fanlasee cruisn
CRUISE SPEED	25 TO 30 KNOTS	25 to 30 KNOTS	25 to 30 KNOTS	1
LIGHTSHIP WEIGHT	5,200 KGS	7,000 KGS	7,250 KGS	

## **4WD OF THE SEA**





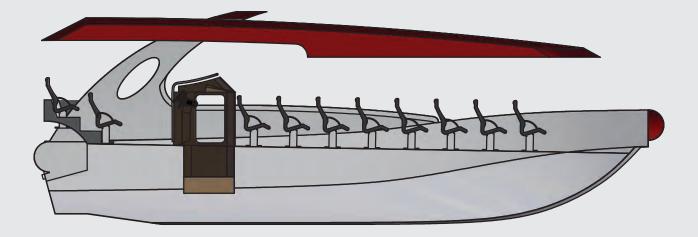

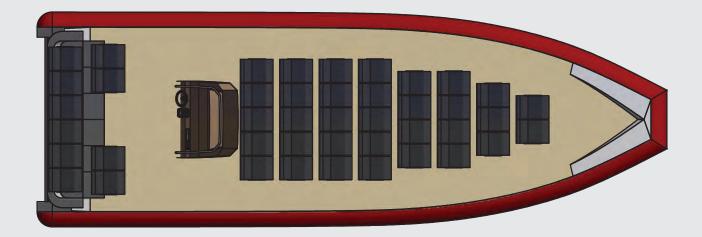



All information is subject to copyright in its entirety. The contents may not be reproduced in any form, either whole or in part without the written permission of the publisher Naiad Design Ltd. All details are subject to change without notice. NAIAD and 4WD OF THE SEA are registered trademarks of Naiad Design Ltd.

## **4WD OF THE SEA**