

Norse 1050



MAIN SPECIFICATION

Length OA (inc fender)	10.4 m
Length Waterline	9.1 m
Beam OA	3.3 m
Draught (light condition)	0.70 m
Main Engines	Twin Perkins Sabre 265 Ti 265 BHP @ 2500 rpm
Gearboxes	Twin Disc MG5091 Gearboxes
Propulsion	Hamilton 291 waterjets
Speed	25 knots at 7.5 tonnes 22 knots at 9.0 tonnes



CAPACITIES

Fuel Capacity	900 litres
Fresh Water	75 litres
Grey Water	30 Litres

AUXILIARY EQUIPMENT

Typical options:

Forepeak Chain locker/anchor stowage

Tank Space tanks, fire system, storage space

Electrical 24v DC - two banks of batteries 240v AC - 6 Kva from M.E. driven alternator

Bilge System Engine driven and hand operated bilge pumps

E.R. Fire system Aqua mist water spray system

ACCOMMODATION

Typical options:

WC incorporating wash basin

Galley inc microwave & boiler

Suspension seating for six

Various layouts available

SPECIAL FEATURES

Including:

Fendering Polyurethane covered elastomer foam high performance system

System of removable sections of handrails around working deck

Navigational Aids & Communications Daylight viewing radar

DGps

Echosounder


DSC VHF radio

Telephone

Flux gate compass

CLASSIFICATION

Built in accordance with MCA SCV – Code of Practice,
Structure designed and surveyed to LRS SSC rules

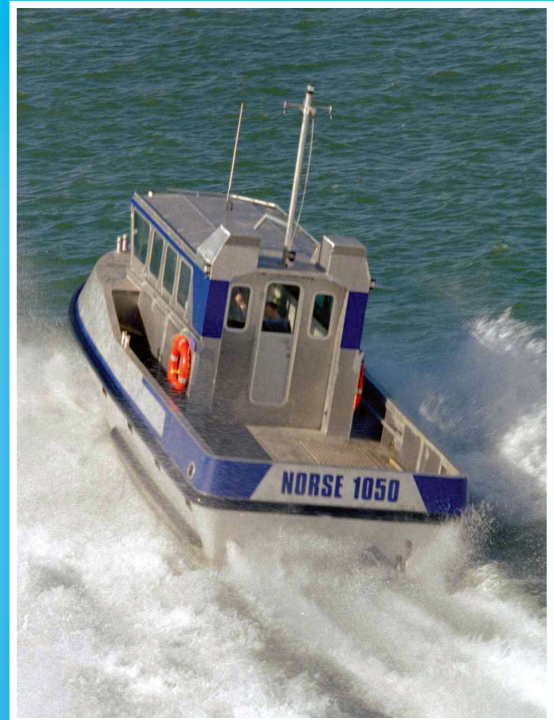

Holyhead Marine Services Limited

Newry Beach Yard, Holyhead, Anglesey, LL65 1YB, Wales, UK

Tel: +44(0)1407 760111 Fax: +44(0)1407 764531

e-mail: marine.services@holyhead.co.uk

website: www.holyhead.co.uk

Registered in London 895484

